DS-KH9310-WTE1 Video Intercom Network Indoor Station





Key Feature

- 7-inch colorful touch screen with resolution 1024 × 600
- UI V2.0: User friendly design
- Plug & play
- Standard PoE
- Receives video call and unlocks via the client software or the mobile client remotely
- Supports link to hikvision devices to bulid a management center




Specification

System paramete	rs				
Memory	1 GB				
Flash	4 GB Emmc				
Display parameters					
Display screen	7-inch colorful TFT touch screen				
Display resolution	1024 × 600				
Operation method	Capacitive touch screen				
Brightness	Adjustable				
Audio parameters					
Audio input	Built-in omnidirectional microphone				
Audio output	Built-in loudspeaker				
Audio	Dane in rougepearer				
compression standard	G.711 U, G.711 A				
Audio quality	Noise suppression and echo cancellation				
Network paramet					
Wired network	10/100 Mbps self-adaptive				
Wireless					
network	Wi-Fi 802.11 b/g/n				
Network	TCD/ID CID DTCD				
protocol	TCP/IP, SIP, RTSP				
Interfaces					
Network port	RJ45				
RS-485	1				
Alarm in	8				
Button	1				
TAMPER	1				
Alarm out	2 relay				
Debugging port	1				
Micro USB	For debug only				
General	, , , , , , , , , , , , , , , , , , ,				
Power supply	12 VDC & standard PoE, IEEE 802.3af				
Power					
consumption	≤ 8 W				
Working	40.00				
temperature	-10 °C to 50 °C (14 °F to 122 °F)				
Working	400/1. 000/				
humidity	10% to 90%				
Dimensions	187 mm × 137 mm × 25.7 mm (7.36" × 5.39" × 1.01")				
Weight	419.3 g (without package) 694 g (with package)				


Available Model

DS-KH9310-WTE1

Dimension

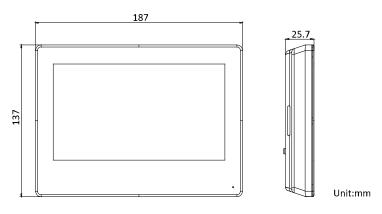

Appearance and Interfaces

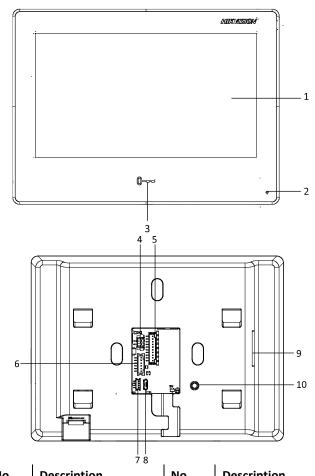

No.	Description	No.	Description
1	Display Screen	6	RS-485/Relay
			Interface
2	Microphone	7	Debugging Port
3	Unlock Button	8	Micro USB Interface
4	Power Terminal	9	Loudspeaker
5	Alarm Terminal	10	TAMPER



Requirements or restrictions on third-party apps as follows:

- 1. Android system version: 5.1.1(or below)
- 2. Storage occupation: ≤ 200M+100M (200MB and 100MB correspond to /data/data, /mnt/internal_sd/Android/data directories respectively), the permanent files of the three-party App are stored in /mnt/internal_sd/Android/data/{three-party App package Name} directory, the data will be cleared when it exceeds the device range
- 3. Memory occupation: ≤ 150 MB
- 4. CPU usage: ≤ 30%
- 5. Number of three-party apps: ≤ 26. Google Play Service: Not supported
- 7. Three-party App version: the requirement must be the Release version
- 8. 3rd App Logo icon: The style refers to the current baseline main interface icon
- 9. The indoor unit is a 32-bit system, and the installed app must also support a 32-bit system

Distributed by	
	\neg
I	

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA

T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690

T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thalland T+662-275-9949 sales.thailand@hikvision.com

Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 [216]521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com

Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 [10] 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T+7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com

Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com

Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com